


PRODUCT DATASHEET

FRI Refractive Index Sensor

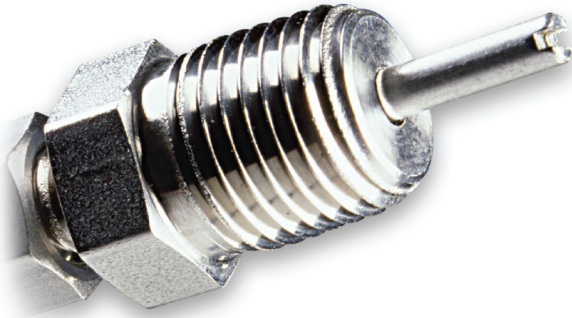

The FRI is a fiber optic refractive index sensor, ideal for refractive index measurement of fluids in chemical and food processing industry applications. It can be used for in-situ applications under microwave conditions and in other hazardous environments.

The FRI is a miniature sensor that provides in-situ refractive index measurements and allows continuous monitoring of any process, whether chemical or food-engineering, thus eliminating manual sampling and measurements repeatability problems. These sensors are also designed to withstand variable temperature, EMI and vibration conditions.

Research engineers in food development, those involved in any area where fluids chemistry and fluids quality control are applied, may now improve process and product technology by monitoring the performance of specific properties over time. This will provide accurate information on changes in the refractive index during the operation, the manufacturing process or throughout the lifetime of a product. The use of the FRI refractive index sensor allows a complete refractive index analysis in the most challenging environments.

Our unique design is based on the variation of a liquid-filled Fabry-Perot optical cavity length to precisely determine the refractive index of the liquid. The liquid-filled optical cavity length varies in direct proportion with the refractive index of the liquid sample. The refractive index measurement is achieved by measuring the Fabry-Perot cavity length using white light interferometer technology.

The fiber optic signal conditioner has the capability to perform the refractive index measurement under challenging conditions of temperature, EMI, humidity and vibration with uncomplicated calibration tasks that the user can perform.

The FRI fiber optic refractive index sensor provides the industry with better and more reliable refractive index measurements for existing applications, and with extended capabilities for new applications requiring continuous in-situ monitoring of fluids refractive index under adverse conditions.

Key Features

- From 1.0000 to 1.7000 RI range
- Intrinsically safe
- Immune to EMI/RFI
- Resolution of 0.0001 RI
- In-situ measurement

Applications

- Industrial environments
- In-situ process monitoring
- Chemical applications
- Harsh and hazardous environments
- Research and development
- Quality control

传感与控制事业部

深圳市新世联科技有限公司

地址：深圳市深圳南中路2006号华能大厦712室
 电话：0755-83680810 83680820 83680830 83680860
 网址：www.apollounion.com

邮编：518031
 传真：0755-83680866
 邮箱：sensor@apollounion.com


Specifications

Refractive index range	From 1.0000 to 1.7000 RI
Resolution ¹	0.0001 RI
Accuracy	±0.0005 RI
Connector type	ST connector
Operating temperature	0°C to 100°C (32°F to 212°F)


1. Signal conditioner dependent.

FRI Dimensions

FRI-BA Model

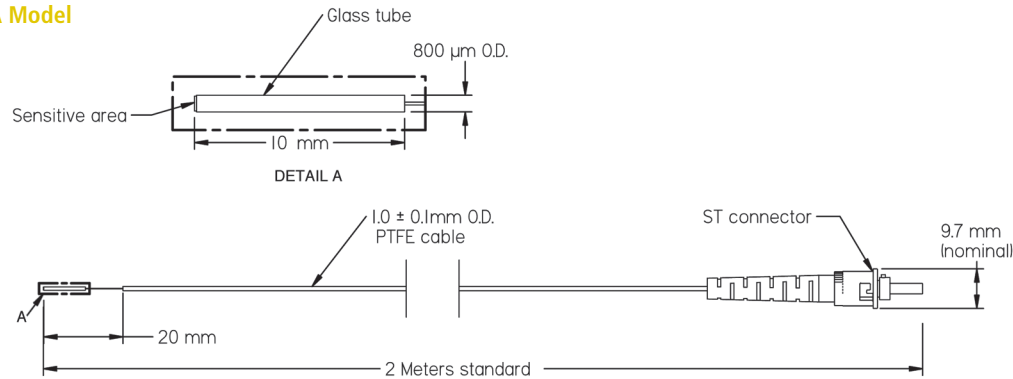

FRI-NP Model

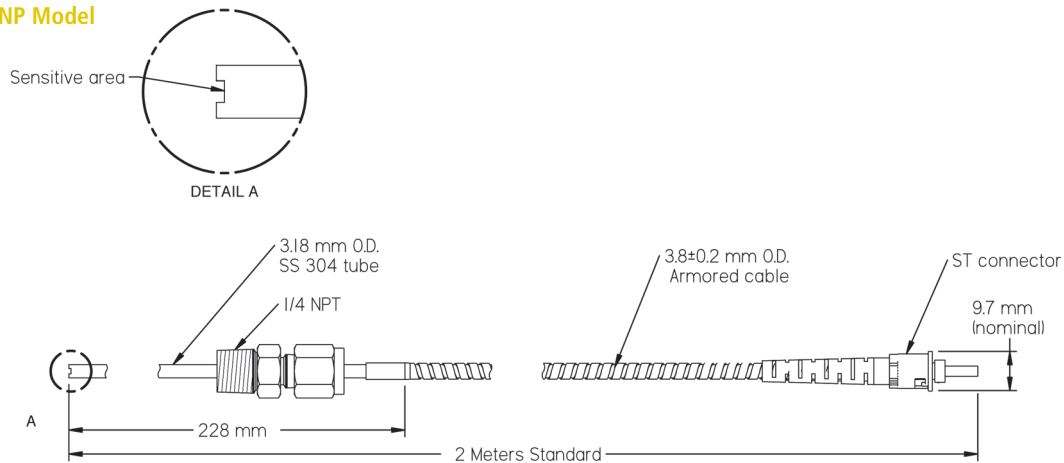

Drawing Numbers: SCH-00508 - SCH-00509

传感与控制事业部

深圳市新世联科技有限公司

地址：深圳市深圳南中路2006号华能大厦712室
 电话：0755-83680810 83680820 83680830 83680860
 网址：www.apollounion.com

邮编：518031
 传真：0755-83680866
 邮箱：sensor@apollounion.com